


Wiring diagram ekey dLine/Glutz MINT




YOUR FINGER. YOUR KEY.

ID377/767/0/730: Version 1, 2021-04-12

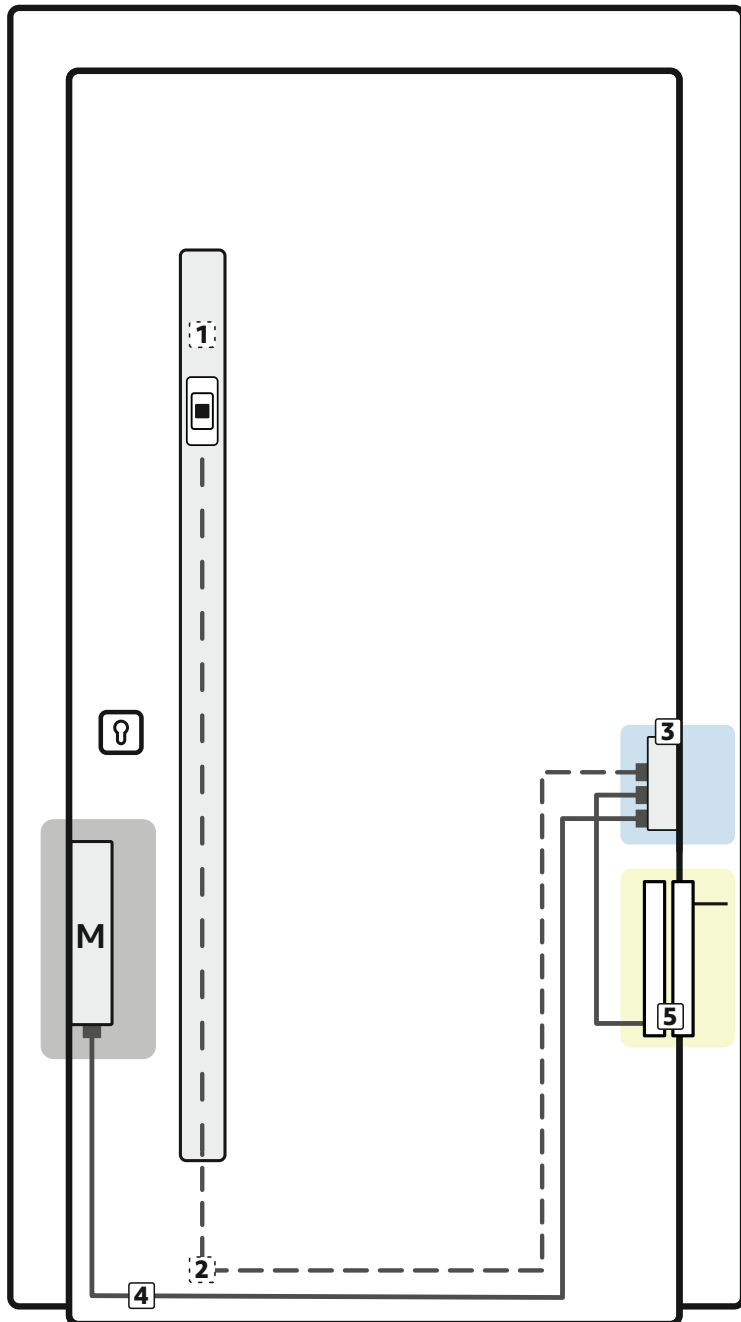

Connection to the motorized lock


4



Pin	Color	Description
6	brown	GND (-)
5	white	VDC (+)
4		
3		
2		
1	green	Switching signal (-)

Connection to the control unit/gateway

4



Pin	Color	Description
4	yellow	Opening signal
3	green	Opening signal
2	brown	GND (-)
1	white	VDC (+)

⚠ Jumper must be removed! ⚠

Connection to the electrical installation

Color	Description
white	VDC (+) (12-24)
brown	GND (-)
green	Do not assign
yellow	Do not assign
blue	Input
gray	Input
pink	Do not assign
red	Do not assign



Potential-free request-to-exit button for manual door opening

⚠ Each unused core must be insulated separately! ⚠

⚠ DANGER

Risk of electrocution: All ekey devices are to be operated with Safety Extra Low Voltage (SELV). Only use power supplies rated protection class 2 with safety approval according to EN 62368-1.

Failure to do so will create a risk of fatal electrocution. Only certified electricians are authorized to carry out electrical installation work on mains systems.

⚠ ATTENTION

Property damage in the event of incorrect mounting and wiring: The system devices are operated using electricity. They could be destroyed if they are mounted and wired incorrectly. Mount and wire the system devices correctly before connecting the power.

📖 NOTICE

This wiring diagram is not subject to updating. We reserve the right to make technical modifications and change the product's appearance; any liability for errors and misprints is excluded.

1 ekey dLine fingerprint 201001 (450007)

2 ekey dLine cable FP 20130x or 20132x

3 ekey dLine controller 201201 (450008)

or ekey dLine gateway 201251 (450009)

4 ekey dLine cable MT Glutz 201354

5 ekey dLine cable transfer 201401, 201405, 201406